



TRUE FOOD SERVICE EQUIPMENT, INC.

St. Charles Industrial Center • P.O. Box 970 • O'Fallon, Missouri 63366
(636)240-2400 • FAX (636)272-2408 • (800)325-6152 • www.truemfg.com

Project Name: _____

AIA #

Location: _____

SIS #

Item #: _____ Qty: _____

Model #: _____

GDM Freezer Series - Glass Door Merchandisers



GDM-49F

*TRUE is the world's largest manufacturer of
glass door merchandisers.*

Glass Door Reach-In Freezers - Two and Three Door

- GDM-35F, GDM-35SL-F,
- GDM-43F, GDM-49F, GDM-72F

SPECIFICATIONS / FEATURES

CABINET CONSTRUCTION:

- Durable and permanent non-peel or chip white vinyl exterior.
- White, vinyl coated aluminum interior cabinet liner with 300 series stainless steel floor. Construction of liner in accordance with NSF standards.
- Cabinet mounted on a welded, galvanized frame rail, painted for additional corrosion protection.
- Safety shielded fluorescent interior lighting. Integrated door light standard.
- Rear wall airflow guard and floor rack prevent frozen product from blocking optimal airflow.

DOORS:

- Triple pane thermal insulated glass. Doors extend full width of cabinet shell. Door gaskets of one piece construction.
- Adjustable, self closing, torsion type closure system with aluminum block supports. The face of each door fitted with a 12" long handle.

INSULATION:

- Entire cabinet structure insulated using foamed-in-place CFC free polyurethane foam.

SHELVING:

- 4 adjustable vinyl coated wire shelves per door. Shelves capable of supporting up to 250 lbs.
- Full height shelf support pilasters, with double oblong holes on 1/2" centers. Pilasters made of the same material as cabinet interior. Four (4) chrome plated, stainless steel shelf clips to be included for each shelf.

REFRIGERATION SYSTEM:

- Refrigeration system factory balanced using CFC free R404A refrigerant.
- Bottom mounted condensing unit - easy access for maintenance.
- Factory pre-engineered capillary tube system with oversized condenser and evaporator to reduce product pull down time and to consistently maintain -10°F interior cabinet temperature. (non-adjustable capillary tube system superior to problematic expansion valve)
- Evaporator - epoxy coated at the time of manufacture to eliminate the potential of corrosion.

ELECTRICAL CHARACTERISTICS:

- Unit completely pre-wired at factory, and ready for final connection to appropriate outlet (see diagram below and NEMA listing next page). A cord and plug set to be included.
- A sole use circuit is required.

Also available:

- Slide Door Refrigerators
- Wine Merchandiser
- Rear Load Models
- Ice Merchandisers
- Glass End Merchandisers
- Convenience Store Coolers
- Counter-Top Merchandisers
- Floral Merchandisers

Remote cabinets and condensing units available for models
GDM-23F, GDM-49F, and GDM-72F.

For other models

remote cabinets available 14% off list
(condensing units supplied by others).

Consult factory technical service dept. for BTU information.

GDM-35F
GDM-43F
GDM-49F
GDM-72F
115/208-230/1
NEMA-14-20R



GDM-35SL-F
115/60/1
NEMA-5-20R



Printed in
U.S.A.



APPROVALS:



Specifications subject to change without notice.

2/03



Exceptions:





GDM Series: Glass Door Freezers - Two and Three Door





GDM-35F





GDM-35SL-F



GDM-43F



GDM-49F

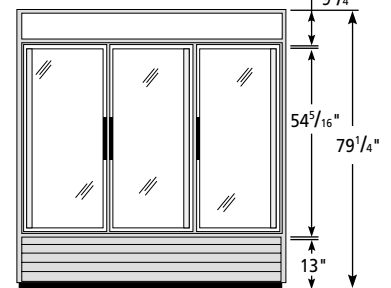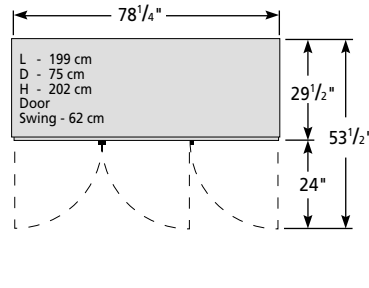

GDM-72F

Rough-In Data

Model	Doors	Capacity (Cu. Ft)	# of Shelves	Dimensions (inches)			HP	Volts	PH	Amps	NEMA Config.	Cord Length (feet)	Crated Weight
				L	D†	H							
GDM-35F*	2	35	8	39 1/2	29 1/2	78 1/4	1	115/208	1	8.8	14-20	9	543
GDM-35SL-F	2	17.1	8	39 1/2	23 1/4	59 3/8	1/2	115	1	10.9	5-20	9	448
GDM-43F*	2	40.6	8	47	29 1/2	78 1/4	1	115/208	1	12.8	14-20	9	542
GDM-49F*	2	49	8	54	29 1/2	78 1/4	1 1/2	115/208	1	14.6	14-20	9	645
GDM-72F*	3	72	12	78 1/4	29 1/2	79 1/4	1 1/2	115/208	1	15.7	14-20	9	890

* Requires 115/208-230/60 Hz, single phase, 3 pole, 4 wire.
Black, rosewood and walnut vinyl exterior available at no extra charge.
† Depth does not include 1 3/8" for door handle.

Specifications subject to change without notice.

Standard Features

- Oversized and balanced, environmentally friendly R404A refrigeration system - holds -10°F.
- White laminated vinyl exterior.
- White, vinyl coated aluminum interior and 300 series stainless steel bottom (NSF approved).
- Standard backguard and floor rack improve airflow.
- Fluorescent interior lighting (safety shielded).
- Integrated door light.
- Bottom mount compressor.
- Triple pane thermal glass.
- Positive seal, torsion type closure system, self-closing doors.
- Adjustable vinyl coated wire shelves.
- Epoxy coated evaporator.
- Large evaporator and coil heater permit short defrost cycle.
- Slide out compressor can be serviced easily and accessed by a single repairman.

- 1 year parts & labor warranty (USA).
- 5 year compressor warranty.
- See our website www.truefmg.com for the latest color & sign offerings.

Optional Accessories

- Black, walnut and rosewood vinyl exterior available.
- Novelty Baskets.
- Additional shelves available.
- Available with 2 1/2" diameter castors.
- Stainless steel or optional seismic legs.
- Remote available for GDM-49F & GDM-72F.

	Model	Front	Right	Plan	3D
	GDM-35F	TFAY17E	TFAY17S	TFAY17P	TFAY173
	GDM-35SL-F	TFD029E	TFD029S	TFD029P	TFD0293
	GDM-43F	TFD030E	TFD030S	TFD030P	TFD0303
	GDM-49F	TFAY03E	TFAY03S	TFMY01P	TFAY033
	GDM-72F	TFAY01E	TFAY01S	TFMY02P	TFAY013

Clearance Required For Coolers (USA)		
Sides Inches/mm	Top Inches/mm	Rear Inches/mm
0 / 0	0 / 0	3 / 77

TRUE FOOD SERVICE EQUIPMENT

