
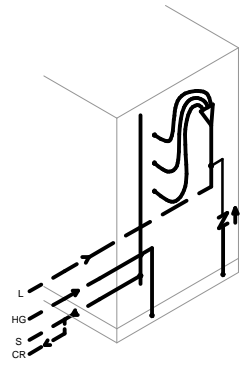
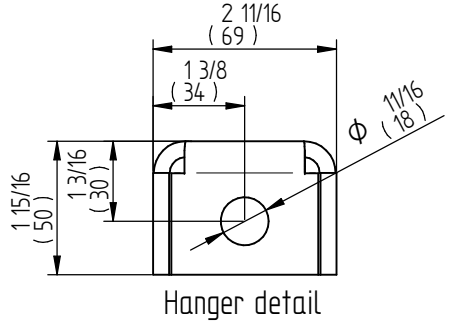
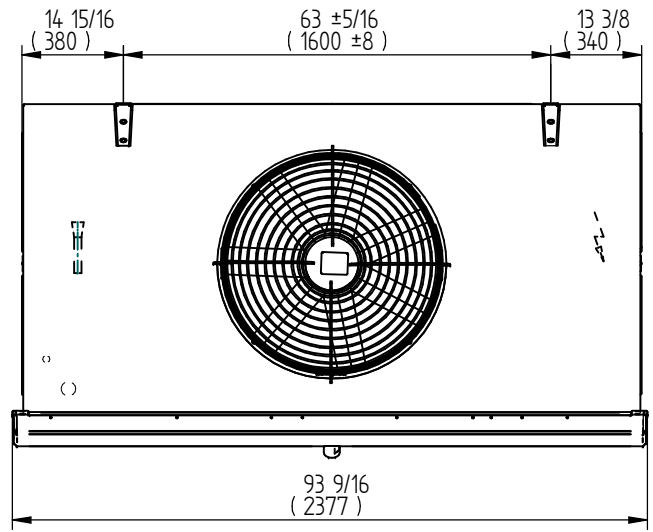



IT ONLY APPLIES  
 FOR THIS PROJECT 508974  
 REV: 01  
 RELEASED: 16/04/2013  
 DATE: 16/04/2013  
 Only for Guntner production

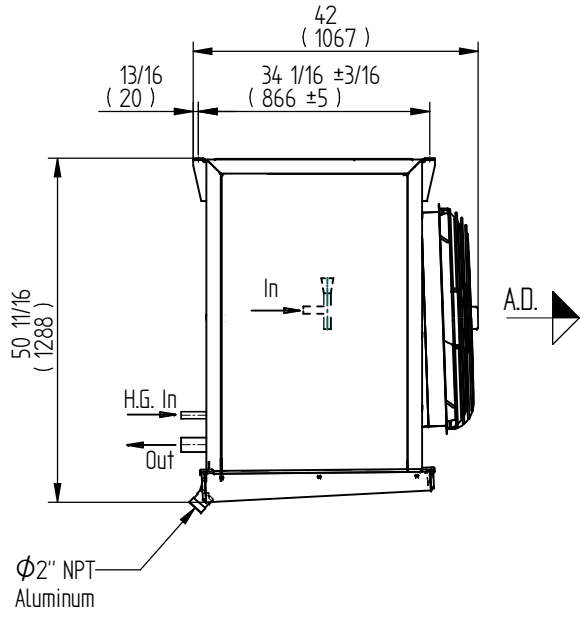

— Factory pipe  
 - - - Suggested field piping  
 Schematic piping arrangement (for customer only)

Performance Data		Physical Data	
Capacity (Btu/h)	:102,411	Coil	:N/08/24/7.0/1600/A/R/S
Temp. Room	:-20.0 F	Surface area	:2,337 ft <sup>2</sup>
R.H.	:95 %	Coil volume	:2.125 ft <sup>3</sup>
ΔT	:10 F	Rows deep	:8
Refrigerant	:R22	Dry Weight/Op. Weight	:806 lb / 1,414 lb ca.
Superheating	:5.0 F	Connection side	:1x Right & 1x Le ft in air direction
Air Flow	:11,877 cfm	Defrost	:Hot gas in coil and tray
Air Pressure	:14.692	Inlet Ø	:1 1/8"
		Outlet Ø	:2 1/8"
		H.G. Inlet Ø	:7/8"
Fan/Motor Data		Fin spacing	:3.6 FPI
Voltage	:460/3/60	Casing Material:	:Galv. Steel
HP fan motor(s), (Qty.)	:1 1/2, (1)	Finish	:Powder coated signal white
RPM	:980	Tray material	:Aluminum
Design motor AMPS	:3.50	Tube material	:Copper
Fan Diameter	:31 1/2"	Fin material	:Aluminum
Type	:ZA		

Reference #:	300630333 / Cimco 4500567954		Project:	McClane Southern	
Notes:	- Hot gas defrost in tray - Hot gas defrost in coil - Hot gas interconnecting tubing with check valve - Double tray with 13/16 in insulation				
Guntner U.S. Ref#:	202797				
			Sc: 120	Customer: FRICK	
			Pos: 20		
			Qty: 2		
			Model:	GHN 080.2H/17-HHL50.M ①	
			Name:	Evaporator	
			Tag Right Unit: AU-6 Tag Left Unit: AU-5		
01	Updated nomenclature	16.04.2013	smata	Drawing.-Nr.: 300-0000370010	
	Revision	Date	Name	Revis. 01	
		12.04.2013	smata	PDM	
		16.04.2013	jtelesforo		
Guntner U.S. L.L.C. 110 W. Hillcrest Blvd. Ste. 105 Schaumburg, IL 60195 USA. Ph.: (847)-781-0900 www.guntnerus.com		Proj:	508974	Order:	115270



measures without specification of tolerances:  
 welding / brazing: DIN EN ISO 13920, tolerance class D  
 general tolerances: DIN ISO 2768-1, tolerance class component parts m / assembly v, DIN ISO 2768-1, tolerance class component parts K / assembly L

protection note acc. to DIN ISO 16016