



BARR INSULATED PANEL

INSULATED METAL PANEL DATA SHEET



Our panels are widely accepted and Utilized in both cold-storage and commercial/industrial applications, the lined profile provides strength, facilitates foam adhesion and helps minimize natural imperfections in the steel faces. The shallow Mesa rib and the unique Green-Lock side-joint help ensure a high-performance vapor seal.

Coverage Width	42-inch
Thickness	4-inch
Exterior/Interior Profile	Stucco White (USDA White)
Exterior/Interior Gauge	26
Exterior/Interior Substrate	Galv alume, G90, Stainless Steel
Exterior Finish	Valspar Kynar 500 or Hylar 5000. low gloss
Interior Finish	Valspar Polyester, standard gloss (USDA White)
Exterior/Interior Texture	Embossed
Joint	Green-Lock, offset double tongue-and-groove
Core	Continuously poured-in-place polyisocyanurate insulating foam
R-Value	R-8 per inch of thickness (nominal)
Standard Lengths	8', 10', 12' 16' and 20'
Weight, Insulation	2.50 pounds per cubic foot (nominal)

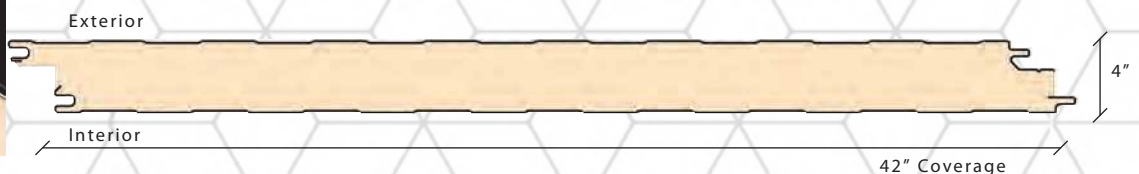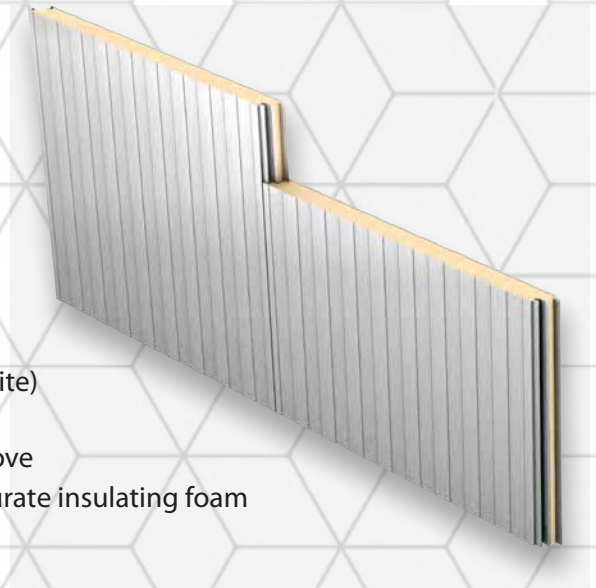

"Built to Perform, Built to Last, Built Right"