

**RYTEC**

HIGH PERFORMANCE DOORS

# TURBO-SEAL® INSULATED


HIGH PERFORMANCE INSULATED ROLL-UP DOOR

## TURBO-SEAL® INSULATED


Simply the Industry's Fastest, Most Energy-Efficient Insulated Door

With unrivaled speed and extraordinary insulating capacity, the Turbo-Seal® Insulated roll-up door is the definitive solution for interior cold storage environments. This revolutionary door is built on the proven Turbo-Seal platform for unmatched reliability and lasting performance.

Turbo-Seal Insulated features an average speed of over 101 inches per second making it ideal for demanding interior cold storage environments and fast-moving food and beverage operations.



**Rylon®  
Thermal Panel**

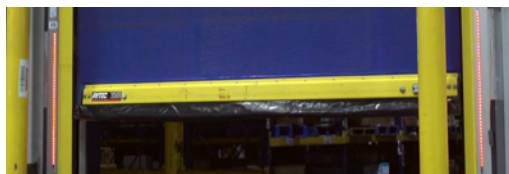

### **Extremely Fast and Quiet**

- Peak speed of up to 182" per second and average speed of up to 101" per second

### **Rylon® Thermal (3.0) Panel**

- One-inch thick, closed-cell foam panel with R-4 insulated value
- Laterally-rigid and vertically flexible with non-porous, moisture-proof vapor barrier for uniform performance

### **Perimeter Seals and Thermal Breaks**

- Quad seals on front and back of panel
- Top vinyl loop seal and low temperature bottom edge seal help eliminate ice propagation
- Full perimeter thermal breaks

### **Self-Repairing**

- Break-away panel instantly self-repairs and resets automatically without manual intervention needed

### **Safety is Standard**

- Pathwatch® Safety Light System, pneumatic reversing edge and thru-beam photo eyes

QUALITY. PERFORMANCE. RELIABILITY.

**RYTECDOORS.COM**

# TURBO-SEAL® INSULATED

## HIGH PERFORMANCE INSULATED ROLL-UP DOOR



Cold  
Storage



Food and  
Beverage

### Size/Dimensions

- Up to 12'W x 21'H
- 39" or 41" headroom above lintel
- 32" or 34" head projection
- 6" side column width
- 9.5" -10.5" side column projection
- 10" side clearance, non-drive side
- 18" side clearance, motor side
- Motor placement on right or left side

### Travel Speed

- Peak speed of up to 182" per second
- Average speed of up to 101" per second

### Operation

- Three horsepower motor
- Counterbalanced with heavy duty straps to assist motor and reduce energy consumption

### Head Assembly

- Integrated fork pockets reduce head clearance requirements and simplify installation
- Construction of support frame allows for easier maintenance and access to door components



Efficient  
3 horsepower  
motor


### Thermal Performance

- Rylon® thermal panel
- Quad seals in side column
- Top vinyl loop seal
- Integral bottom edge seal
- Integrated thermal breaks around entire door assembly

### Electrical Controls


- System 4® controller housed in a NEMA 4X rated enclosure with factory set parameters
- Intelligent processor monitors and controls power consumption during operation
- Advanced self-diagnostics for troubleshooting

System 4 shown with  
optional rotary disconnect



### Panel Construction


- 1 inch thick insulated panel
- Three-layer construction consisting of Rylon, closed-cell foam and proprietary thermally-laminated protective film
- Uniform thermal performance from edge-to-edge
- No heat-sealed pockets, stitching, spun insulation or quilted pads



Rylon (3.0) Thermal Panel

### Side Column Construction

- Extruded aluminum and fiberglass construction
- Modular design for easy brush seal or fiberglass section replacement
- Counterweight strap inspection window
- Low profile side column




Low profile footprint with  
integral thermal breaks

### Bottom Bar

- Low profile bottom bar with integral thermal breaks
- Completely sealed battery enclosure eliminates moisture build-up
- Thermal break-away tabs provide a tight seal in the side column
- Fully sealed reversing edge with floor sweep

### Safety is Standard

- Pathwatch® Safety Light System
- Dual thru-beam photo eyes
- Sensitivity-adjustable pneumatic reversing edge
- Ry-Wi® Wireless System



Pathwatch Safety System

### Warranty

- One-year limited warranty on materials and workmanship
- One-year limited warranty on insulated panel
- Lifetime warranty on counterweights

### Options

- Single source transformer

Standard maximum sizes shown; larger sizes may be available upon request.

American Owned, American Made



◀ Watch All Rytec Testimonials

Specifications subject to change  
© 2023 Rytec Corporation LIT051523

**RytecDoors.com**  
**888-GO-RYTEC**

info@rytecdoors.com  
P: 262.677.9046 F: 262.677.2058  
One Cedar Parkway, PO Box 403  
Jackson, WI 53037-0403

**RYTEC**

HIGH PERFORMANCE DOORS